

Status Indicator Lights


PART NUMBERS & PRICING

TXXSTATLT2-024	Status Light 2-Color Green/Red 24 Vac/Dc	\$675 List
TXXSTATLT2-120	Status Light 2-Color Green/Red 120 Vac/Dc	\$675 List
TXXSTATLT3-024	Status Light 3-Color Green/Amber/Red 24 Vac/Dc	\$800 List
TXXSTATLT3-120	Status Light 3-Color Green/Amber/Red 120 Vac/Dc	\$800 List




Standard 3-light unit

Dimensions in inches (mm)

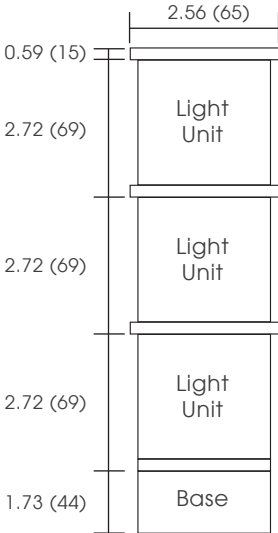

Standard 2-light unit

Dimensions in inches (mm)

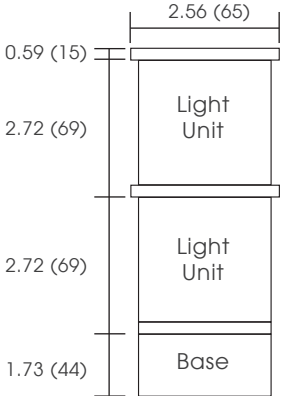


Status Indicator Lights

MOUNTING OPTIONS

Stacklight bases may be mounted without the use of an extension tube or mounting base. If additional height is required, choose extension tubes that fit between the mounting base and stacklight base. The extension tubes are threaded with 3/4" NPT threads, allowing for direct connection to conduit fittings or threaded holes without the use of a mounting base.

4-hole mounting

3/4" conduit hub

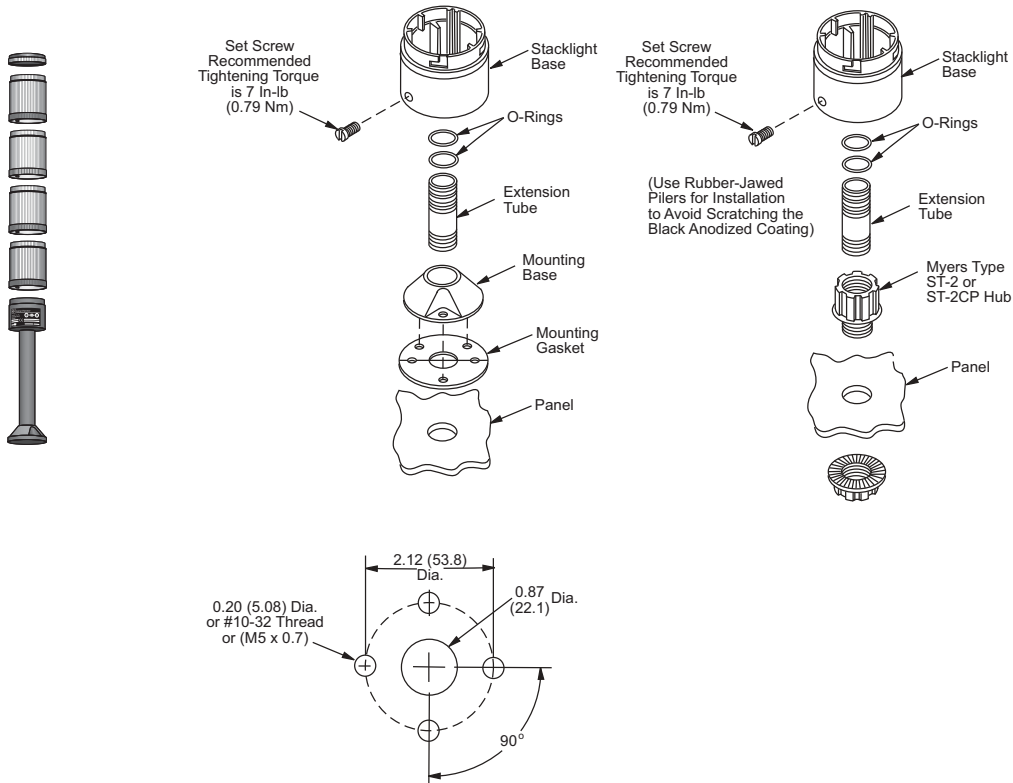

APPLICATION DATA

Type of Light	Voltage AC/DC	Lamp Used	Approximate Current, mA per Light	Theoretical Lamp Life, Hours As Applied
Incandescent	24V	BA15d	208mA	7,000
	110-140V	BA15d	36-50mA	7,000